
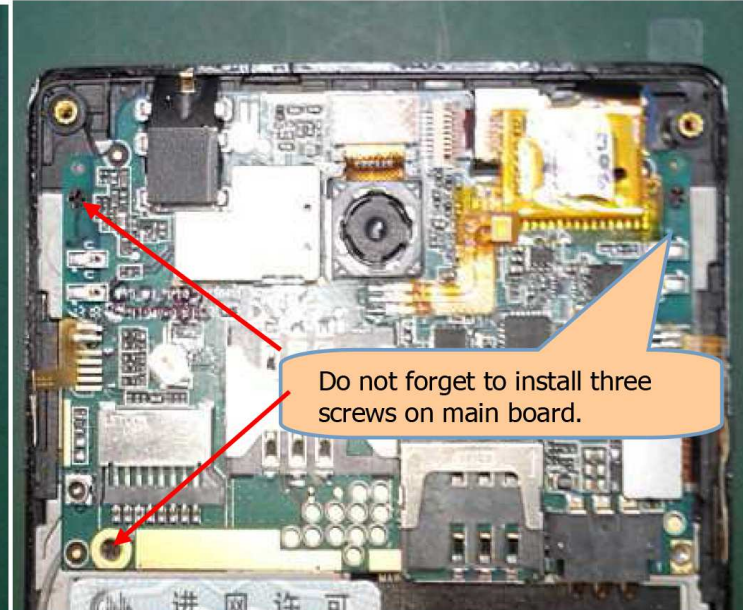
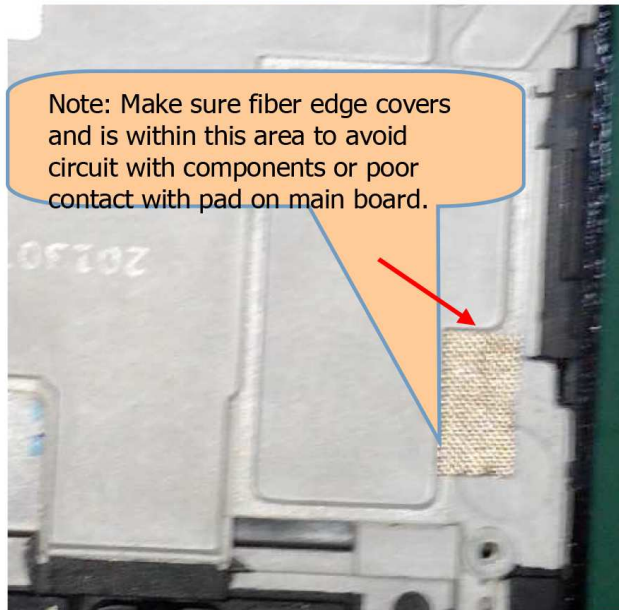
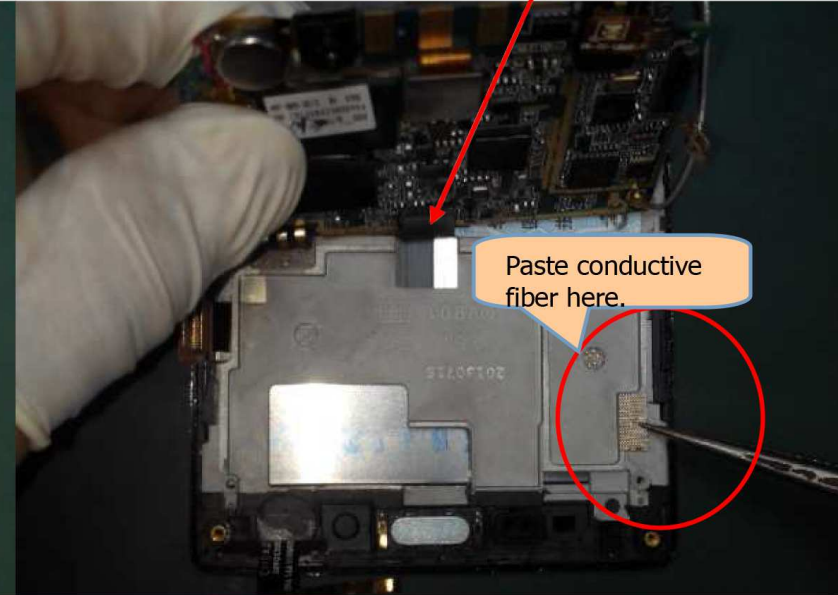



X7 GPS Replacement Procedure

1. Paste conductive fiber on main board.

Before assemble check that the connector is connected.

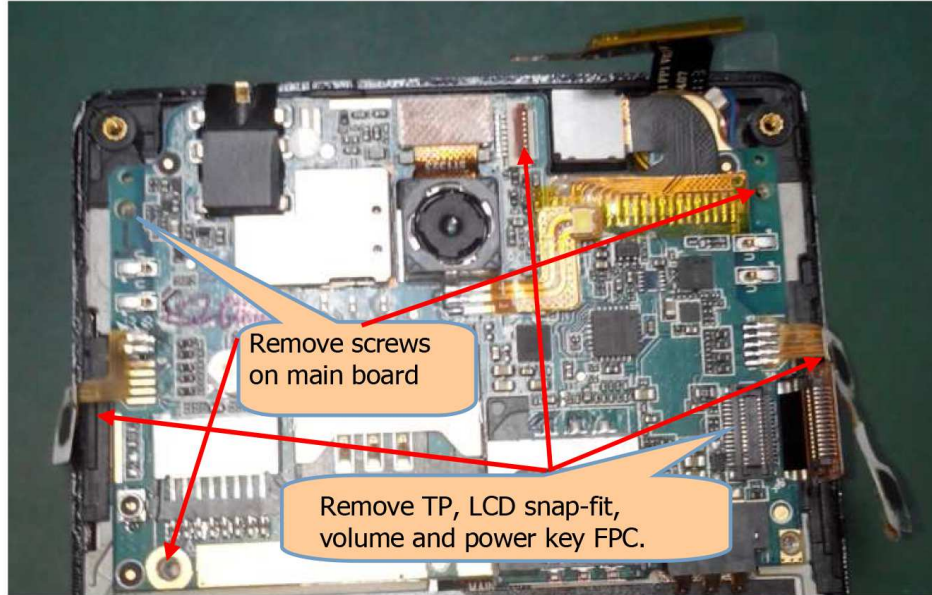


The ground pin must have no contact with the antenna.

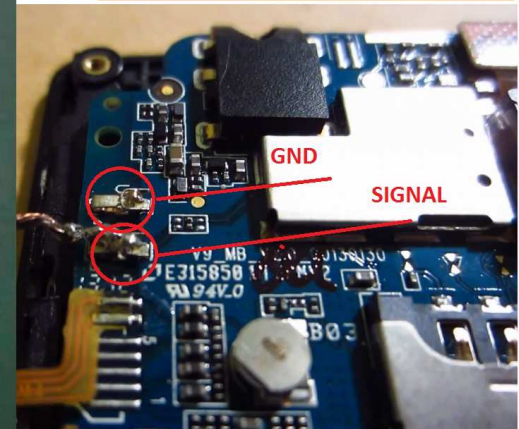

X7 GPS Replacement Procedure

2. Paste antenna on rear cover

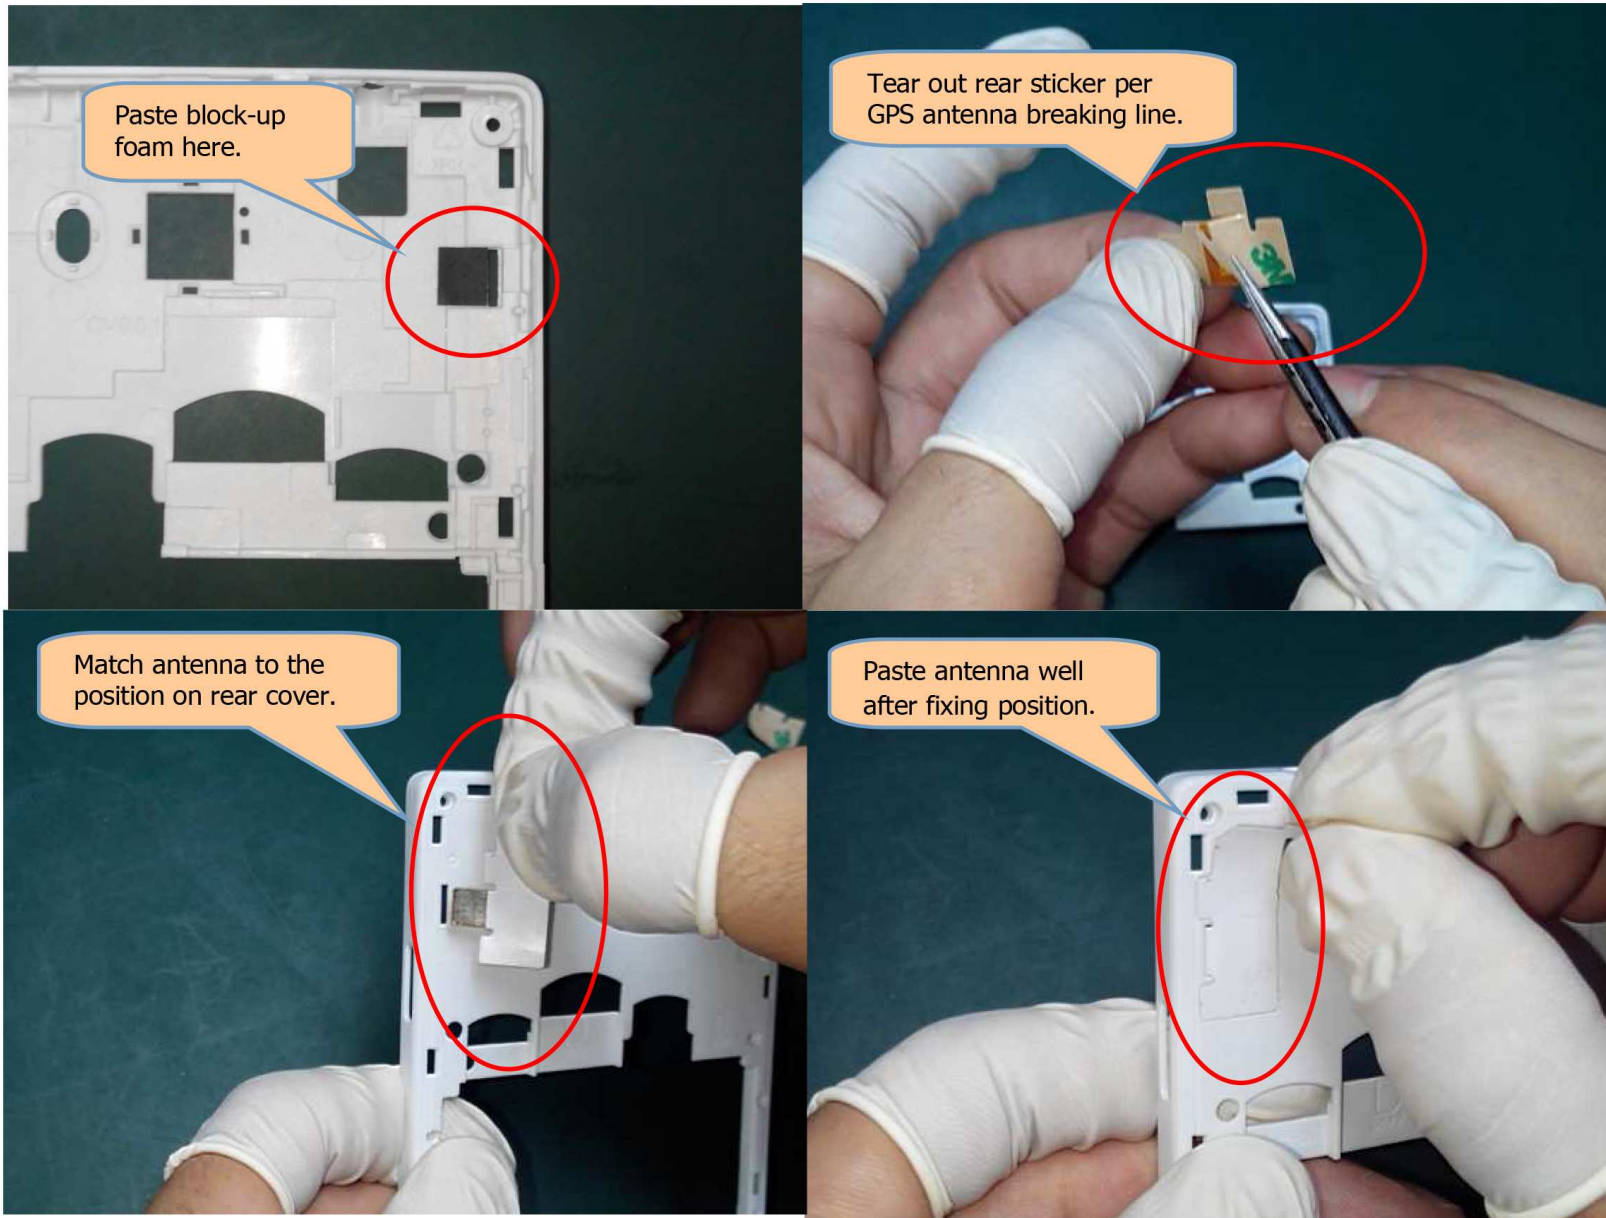

X7 GPS Replacement Procedure

2. Paste antenna on rear cover

